

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
13 November 2003 (13.11.2003)


PCT

(10) International Publication Number
WO 03/092901 A1

- (51) International Patent Classification⁷: B04C 3/00, 3/04
(21) International Application Number: PCT/NL03/00318
(22) International Filing Date: 1 May 2003 (01.05.2003)
(25) Filing Language: Dutch
(26) Publication Language: English
(30) Priority Data: 1020531 3 May 2002 (03.05.2002) NL
(71) Applicants (for all designated States except US): SPARK TECHNOLOGIES AND INNOVATIONS N.V. [NL/NL]; Kaya W.F.G. (Jombi), Mensing 36, Willenstad, Curaçao (AN). KOCH-GLITSCH N.V. [NL/NL]; Schuurloeweg 81, Willenstad, Curaçao (AN).
(72) Inventor; and
(75) Inventor/Applicant (for US only): SCHOOK, Robert [NL/NL]; Vlielandlaan 39, NL-6922 EC Duiven (NL).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZH, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: DEVICE AND METHOD FOR SEPARATING A MIXTURE

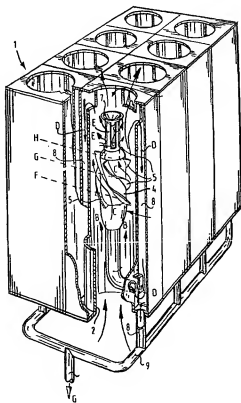

(57) Abstract: The present invention relates to a device for separating a mixture, comprising: - a flow body along the outer surface of which the mixture for separating can be carried; - one or more swirl blades arranged on the flow body for setting mixture flowing therealong into a rotating movement for the purpose of separating the mixture into a relatively heavy and relatively light fraction, characterized in that the swirl blade extends substantially obliquely relative to the perpendicular to the outer surface of the flow body.

WO 03/092901 A1

**Published:**

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

DEVICE AND SYSTEM FOR SEPARATING A MIXTURE

The present invention relates to a device and system for separating a mixture.

Many types of separating device are known for separating gas/liquid mixtures, for instance in order to
5 dry natural gas. In a so-called axial cyclone the entering gas/liquid mixture is set into a rotating movement, whereby a heavy fraction (in the order of magnitude of up to 45% of the total flow) in which a relatively large amount of liquid is present, is flung
10 against the outer wall of the cyclone, while a relatively light fraction remains flowing further in or close to the centre of the cyclone. In so-called axial recycle cyclones a part of the heavy fraction that has been set into rotation is discharged, wherein a part of
15 this discharged fraction is reintroduced into the flow in order to also further separate this part of the heavy fraction into a heavy and light fraction. Recycling of a part of the heavy fraction has the purpose, among others, of increasing the separating efficiency of the
20 cyclone.

From the Netherlands patent NL 101478 of applicant is known an axial recycle cyclone consisting of a tube which has on the underside an inlet for the gas/liquid mixture and on the upper side thereof an outlet opening.
25 Placed roughly centrally in the space enclosed by the tube is a flow body which is provided with swirl blades or vanes for setting into rotating movement the gas/liquid mixture fed in via the inlet.

For structural reasons the swirl blades of the
30 known cyclones are herein mounted perpendicularly of the flow body.

Although the mixture flowing along the thus mounted swirl blades is set into rotation, the flowing mixture

has no natural flow profile. This has negative consequences for the separating efficiency of the cyclone. A further drawback is that, given determined separating conditions, the pressure drop over the cyclone is relatively large. This means a limitation in the capacity of the cyclone.

Known from the British patent specification GB 851 498 A is a separating device in which helical vanes are arranged in an oblique position on a central flow body so as to set into rotation a mixture flowing along the flow body. The swirl blades are however straight in outward (radial) direction, which has an adverse effect on the flow.

From the American patent specification US 3 616 619 is known a separating device in which a number of helical swirl blades are arranged on a central flow body. However, the applied swirl blades appear to have an outward (radial) fixed curvature. Such swirl blades also result in an inadequate separation of the mixture.

It is an object of the present invention to provide an improved device and an improved system for separating a mixture in which at least the above stated drawbacks of the prior art are obviated.

This object is achieved according to the invention in a device for separating a mixture, comprising:

- a flow body along the outer surface of which the mixture for separating can be carried;
- at least one swirl blade arranged on the flow body for setting a mixture flowing therealong into a rotating movement from the proximal end to the distal end thereof, for the purpose of separating the mixture into a relatively heavy and a relatively light fraction, wherein the position of the swirl blade is substantially oblique relative to the perpendicular to the outer

surface of the flow body and the swirl blade is outwardly curved, and wherein the outward curvature of the swirl blade and/or the position of the swirl blade varies at different positions between the proximal and distal end of the swirl blade.

By placing the curved swirl blade obliquely relative to the flow body in such a manner, a more natural flow profile of the mixture flowing along the swirl blades can be brought about. Depending on the situation, the curvature of the swirl blade or the position of the swirl blade, as seen from the proximal end in the direction of the distal end, can still be varied. The pressure drop over the swirl blades can be reduced by 30% or more while the separating efficiency remains constant. Downstream of the swirl blades there is further provided a more uniform flow with fewer swirls, which increases the separating efficiency of the device. The "slip" is hereby also minimized. "Slip" is here understood to mean the difference between the flow angle of the distal end of a swirl blade (the geometric angle between the end part of a swirl blade and the axial direction) and the effective flow angle in the separator itself (downstream of the relevant swirl blade). In the ideal case these angles are equal to each other. In practice there is a difference between the two angles. This difference is referred to as "slip".

According to a first preferred embodiment the swirl blade extends substantially obliquely relative to the flow body at the position of the connection of the swirl blade to the flow body. This means that the swirl blade connects obliquely onto the surface of the flow body. A more natural flow profile can be obtained by having the swirl blade connect obliquely to the flow body. The

improvement already occurs if the angle (α) between the swirl blade and the perpendicular to the flow body surface amounts substantially to more than 5° at the position of the connection of the relevant swirl blade to the flow body. An even more natural profile is obtained when said angle (α) is substantially between 25° and 65°.

In the above stated embodiment the swirl blade itself can be substantially straight in radially outward direction and in the direction of the radial end of the swirl blade, i.e. in the direction of the free longitudinal edge of the swirl blade. In the light of obtaining a more natural flow profile, it is however recommended to give the swirl blades a curved form in radial direction. This is understood to mean that there is more or less curvature from the connection of a swirl blade onto the flow body to the above mentioned free longitudinal edge of the swirl blade, wherein the angle (α) between the swirl blade and the perpendicular to the flow body surface preferably increases gradually towards the outside.

It is noted that a flow profile can be realized which is improved, although less so than in the previous embodiment, if the swirl blades are take a curved form in radial direction and therefore extend substantially obliquely relative to the perpendicular to the surface of the flow body, while the swirl blades do connect perpendicularly to the flow body.

In order to set the mixture into rotation the swirl blades take a curved form in axial (longitudinal) direction or flow direction, wherein the curvature increases in axial or flow direction.

The separating device can be applied not only to separate gas/liquid mixtures as set forth above, but also to separate mixtures in general, such as for

instance liquid/liquid mixtures and/or gas/solid mixtures.

The invention also relates to a separating system for separating a mixture, comprising:

- 5 - a tube which is provided with at least one inlet opening for infeed of the mixture for separating and at least one outlet opening for outfeed of the separated mixture;
- a flow body disposed in the tube, along the outer
10 surface of which the mixture for separating can be carried;
- one or more swirl blades arranged on the outer surface of the flow body and/or the inner surface of the tube, along which blades a mixture flows from a proximal
15 end to a distal end for the purpose of setting the mixture into a rotating movement so as to separate the mixture into a relatively heavy and a relatively light fraction,
 wherein the position of the swirl blade is substantially
20 oblique relative to the perpendicular to the outer surface of the flow body and the swirl blade is curved outward,
 and
 wherein the outward curvature of the swirl blade and/or
25 the position of the swirl blade varies at different positions between the proximal and distal end of the swirl blade.

The swirl blades can herein be fixed to the tube, to the flow body or to both the flow body and the tube.

- 30 For an optimum separating efficiency a further preferred embodiment relating to an axial recycle cyclone comprises:

- one or more outflow openings arranged downstream relative to the swirl blades for the purpose of causing
35 a part of the mixture to flow laterally out of the tube;

- a recycle conduit arranged in axial direction through the rotating means for carrying back into the tube the part of the mixture which has exited via the outflow openings.

5 Further advantages, features and details of the present invention will be elucidated on the basis of the description of a preferred embodiment thereof. Reference is made in the description to figures, in which:

Figure 1 shows a partly broken-away perspective
10 view of a preferred embodiment of the system according to the invention;

Figure 2a shows a photo of a cross-sectional preferred embodiment of the device according to the invention;

15 Figure 2b shows a partly broken-away perspective view of the preferred embodiment of the device according to the invention shown in figure 1; and

Figures 3a-3f show schematic sections of a number of further preferred embodiments.

20 Separation vessels are known for separating gas/oil mixtures whereby the gas/liquid mixture fed under high pressure can be separated into a substantially gas-containing part and a substantially liquid-containing part (respectively the light and heavy fraction). After
25 a first separation the mixture is guided along cyclone boxes arranged in the separation vessel. An example of such a cyclone box 1 is shown in figure 1.

Cyclone box 1 consists of eight cyclones. The gas/liquid mixture is supplied from below and guided
30 into each of the cyclone tubes 3 of cyclones 2 (arrows A). The gas/liquid mixture flows further upward in axial direction (arrows B) and arrives at a flow body 4 positioned in tube 3. Flow body 4 can take many forms. However, in order to reduce the pressure losses in tube
35 3, the outer surface of the flow body will in most cases

be curved and have a form similar to the form shown in figure 2.

A number of swirl blades or vanes 5 is arranged against the outer surface of flow body 4. Swirl blades 5 set the mixture flowing therealong into rotation (the mixture herein acquires a tangential component of velocity), which is represented by arrows C. By setting the gas/liquid mixture into rotation a relatively heavy part of the fraction, which in this case signifies a part containing a relatively large quantity of liquid, will be flung outward under the influence of the occurring centrifugal forces and come to lie against the inside of wall 3, while a relatively light part, which in this case signifies the part containing a relatively large quantity of gas, continues to flow round and close to the centre of tube 2.

The light fraction exits on the upper side of tube 3 (arrow F) and subsequently discharged in a manner not shown. The heavy fraction flung outward by the rotating movements is partly discharged via openings 7 in tube 3 and enters a recycle conduit 8 (arrow D). Recycle conduit 8 extends through flow body 4 so that the relevant part of the heavy fraction is carried back into the tube again on the upper side of the flow body (arrow E). Further connected to recycle conduit 8 is a conduit 9 for discharge of the heavy fraction, which conduit debouches onto an annular conduit 10 onto which debouch the discharge conduits of the other cyclones (arrow G).

Although the separating system shown in figure 1 is a system in which so-called recycle cyclones are applied, the invention can however also be applied to other separating devices, for instance axial cyclones without recycling, cyclones for separating gas and solid particles, separating devices for two or more liquids (liquid/liquid separators) and so on.

In figure 2 the preferred embodiment of the invention is shown in more detail. Figure 2 is a partly cut-away view in perspective of a flow body 4 which is placed in a tube 3. Swirl blades 5 are arranged obliquely on the outer surface 11 of flow body 3. This is made clearer in figure 3a. The angle α between the perpendicular n to the outer surface 11 of the flow body and the lower part of the relevant swirl blade 5 amounts to less than 90° . In most cases the angle α will be between $25-65^\circ$. As a result of the oblique position of the swirl blades the mixture flowing therealong has a more natural flow profile, which ensures a better flow of the mixture along the blades.

Figure 3b shows a cross-section of another preferred embodiment, in which the swirl blades 5' have a position in which they are placed in known manner perpendicularly to flow body 4, but in which the swirl blades are partly or wholly curved in outward or radial direction, i.e. from said connection to the flow body as far as the free longitudinal edge of the swirl blade in question. In the shown embodiment the swirl blade is not curved close to the end connecting to the flow body, while the swirl blade is curved close to the opposite end. It is likewise conceivable to have the curvature start immediately at the position of the connection to the flow body.

Figure 3c shows a cross-section of a further preferred embodiment, in which swirl blades 5'' not only have an oblique position (i.e. at the position of the connection) relative to the surface of flow body 4, but are also curved in outward (radial) direction.

When a swirl blade is followed in the flow direction, it is found that the position of a swirl blade and/or the curvature of the swirl blade changes. This change is adjusted such that an optimal flow

profile is created. Such a change is made apparent in the following figures 3e and 3f, in which a single swirl blade is shown at different positions (the other swirl blades are omitted for the sake of clarity of the description).

In a further advantageous preferred embodiment, the position of a swirl blade becomes increasingly more oblique from the upstream side (inflow side) to the downstream side of the flow body. The position of the swirl blade herein preferably progresses in constant manner. This is shown in figure 3d, in which the unbroken line shows swirl blade 5 in cross-section at a first position F, the dashed line shows the swirl blade in cross-section at a second position G and the dash-dot line shows the swirl blade in cross-section at a third, further advanced position H. It can be clearly seen that the position of the swirl blade along the flow body varies, i.e. from the upstream end to the downstream end.

In another advantageous preferred embodiment the curvature of a swirl blade varies as seen from the upstream end (inflow end) to the downstream end of the flow body. This is shown in figure 3e, in which the unbroken line shows swirl blade 5 in cross-section at a first position F, the dashed line shows swirl blade 5 in cross-section at a second position G and the dash-dot line shows the swirl blade in cross-section at a third, further advanced position H. It can be clearly seen that the curvature of the swirl blade at position F is less than at position B and the curvature at position G is in turn less than at position H. The curvature of a swirl blade (the other swirl blades are omitted for the sake of clarity in the figures) thus varies along the flow body, i.e. from the upstream end to the downstream end.

In a particularly advantageous embodiment of the invention, as shown in figure 3f, the position of the swirl blades varies as well as the curvature thereof.

As can be inferred from figure 1, the upstream part
5 of a swirl blade, i.e. in figure 1 the lower part of swirl blade 12, is arranged axially, i.e. substantially parallel to the longitudinal axis of the flow body. This corresponds with a very large radius of curvature, for instance in the order of magnitude of more than 1 to 1.5
10 m. Further downstream herefrom the curvature of the swirl blades will increase gradually in order to set the mixture flowing therealong into gradual rotation. The radius of curvature at the downstream end of the swirl blades then decreases continuously to a value which can
15 be as small as 5 cm.

The present invention is not limited to the above described preferred embodiment thereof; the rights sought are defined by the following claims, within the scope of which many modifications can be envisaged.

CLAIMS

1. Device for separating a mixture, comprising:
 - a flow body along the outer surface of which the
 - 5 mixture for separating can be carried;
 - at least one swirl blade arranged on the flow body for setting a mixture flowing therealong into a rotating movement from the proximal end to the distal end thereof, for the purpose of separating the mixture
 - 10 into a relatively heavy and a relatively light fraction, wherein the position of the swirl blade is substantially oblique relative to the perpendicular to the outer surface of the flow body and the swirl blade is outwardly curved,
 - 15 and
 - wherein the outward curvature of the swirl blade and/or the position of the swirl blade varies at different positions between the proximal and distal end of the swirl blade.
- 20 2. Device as claimed in claim 1, wherein the outward curvature increases from the proximal end to the distal end of the swirl blade.
3. Device as claimed in claim 2, wherein the curvature increases uniformly over at least a part of
- 25 the swirl blade.
4. Device as claimed in any of the foregoing claims, wherein the position of the swirl blade varies from the proximal end to the distal end.
5. Device as claimed in claim 4, wherein the
- 30 position of the swirl blade increases uniformly over at least a part of the swirl blade.
6. Device as claimed in claim 1, wherein the swirl blade extends substantially obliquely relative to the flow body at the position of the connection of the swirl
- 35 blade to the flow body.

7. Device as claimed in claim 6, wherein the angle (α) between a swirl blade and the perpendicular to the flow body surface amounts substantially to more than 5° at the position of the connection of the swirl blade to the flow body.

8. Device as claimed in claim 1, wherein the angle (α) between the swirl blade and the perpendicular to the flow body surface amounts substantially to between 25° and 65° at the position of the connection of a swirl blade to the flow body.

9. Device as claimed in any of the foregoing claims, wherein the angle (α) between the swirl blade and the perpendicular to the flow body surface increases gradually towards the outside.

10. Device as claimed in any of the foregoing claims, wherein one or more of the swirl blades has an increasing axial curvature from the proximal end to the distal end.

11. Device as claimed in claim 10, wherein the swirl blade extends substantially axially over a part from the proximal end, and the remaining part has an increasing curvature up to the distal end.

12. Device as claimed in any of the claims 1-11, wherein the mixture for separating is a liquid/liquid mixture, a liquid/gas mixture and/or a gas/solid mixture.

13. Separating system for separating a mixture, comprising:

- a tube which is provided with at least one inlet opening for infeed of the mixture for separating and at least one outlet opening for outfeed of the separated mixture;


- a flow body disposed in the tube, along the outer surface of which the mixture for separating can be carried;

- one or more swirl blades arranged on the outer surface of the flow body and/or the inner surface of the tube, along which blades a mixture flows from a proximal end to a distal end for the purpose of setting the mixture into a rotating movement so as to separate the mixture into a relatively heavy and a relatively light fraction, wherein the position of the swirl blade is substantially oblique relative to the perpendicular to the outer surface of the flow body and the swirl blade is curved outward, and wherein the outward curvature of the swirl blade and/or the position of the swirl blade varies at different positions between the proximal and distal end of the swirl blade.

14. Separating system as claimed in claim 13, comprising:

- one or more outflow openings arranged downstream relative to the swirl blades for the purpose of causing a part of the mixture to flow laterally out of the tube;
- a recycle conduit arranged in axial direction through the rotating means for carrying back into the tube the part of the mixture which has exited via the outflow openings.

15. Separating system as claimed in claims 12 and 13 with a device as claimed in any of the claims 1-11.

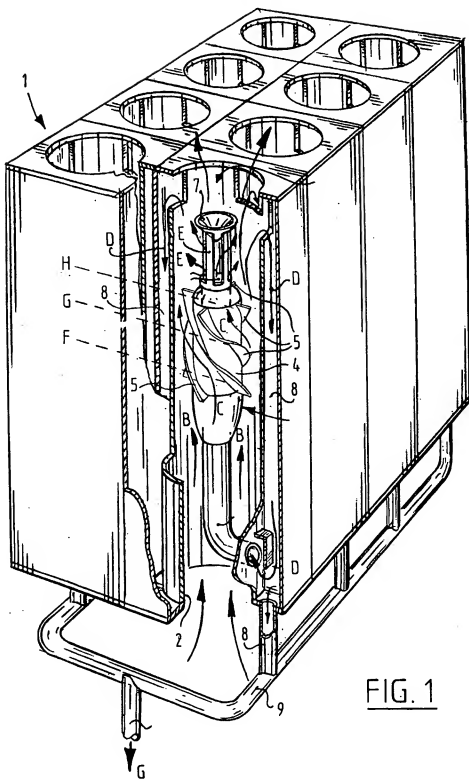

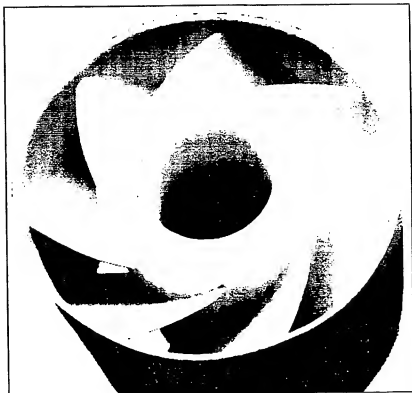
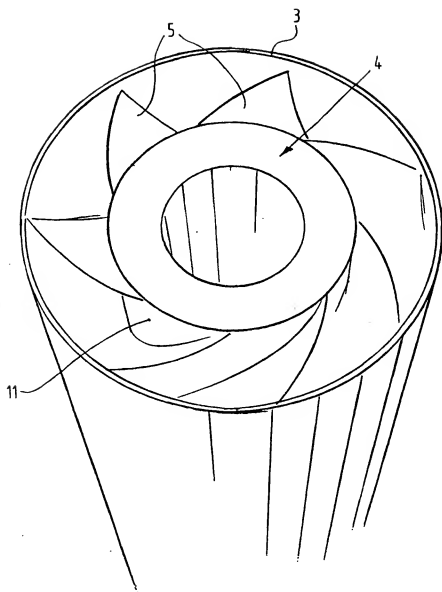








FIG. 2a

FIG. 2b

FIG. 3aFIG. 3bFIG. 3c

FIG. 3dFIG. 3eFIG. 3f

INTERNATIONAL SEARCH REPORT

PCT/ML 03/00318

A. CLASSIFICATION OF SUBJECT MATTER IPC 7 B04C3/00 B04C3/04		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC 7 B04C B01D		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal, PAJ		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 851 498 A (TERMOKIMIK CORP S P A IMPIANTI) 19 October 1960 (1960-10-19) cited in the application page 2, line 98 -page 3, line 54; figures	1,13
A	US 3 616 619 A (KLEIN HEINRICH) 2 November 1971 (1971-11-02) cited in the application column 2, line 45 - line 50; figures 1,3	1,13
A	DE 19 38 695 B (GOTTFRIED BISCHOFF BAU) 11 March 1971 (1971-03-11) figures	1,13
-/-		
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered in the context of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "A" document member of the same patent family		
Date of the actual completion of the international search 5 August 2003		Date of mailing of the international search report 20/08/2003
Name and mailing address of the ISA European Patent Office, P.B. 5010 Patentkanal 2 NL - 2200 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl Fax (+31-70) 340-3016		Authorized officer Leitner, J

INTERNATIONAL SEARCH REPORT

PCT/TL 03/00318

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 00 25931 A (CDS ENGINEERING B V ;CUYPERS CINDY THERESE CORNELIA (NL); STANBRID) 11 May 2000 (2000-05-11) cited in the application abstract; figure 2 -----	1,13
A	WO 00 74815 A (SWANBORN ROMBOUT ADRIAAN) 14 December 2000 (2000-12-14) page 9, line 3 - line 12; figure 2 -----	1,13

INTERNATIONAL SEARCH REPORT

PCT/NL 03/00318

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 851498	A	19-10-1960	BE 563005 A CH 360153 A FR 1188672 A GB 877257 A NL 110597 C	15-02-1962 24-09-1959 13-09-1961
US 3616619	A	02-11-1971	AT 280966 B AT 284798 B BE 721442 A CH 462788 A DE 1619920 B1 FR 1601321 A GB 1183912 A NL 6803444 A SE 352251 B	11-05-1970 25-09-1970 03-03-1969 30-09-1968 01-10-1970 17-08-1970 11-03-1970 31-03-1969 27-12-1972
DE 1938695	B	11-03-1971	DE 1938695 A1	11-03-1971
WO 0025931	A	11-05-2000	NL 1010478 C2 AT 224773 T AU 1189700 A DE 69903196 D1 DE 69903196 T2 DK 1154862 T3 EP 1154862 A1 ES 2184525 T3 WO 0025931 A1 NO 20012195 A PT 1154862 T	08-05-2000 15-10-2002 22-05-2000 31-10-2002 30-04-2003 03-02-2003 21-11-2001 01-04-2003 11-05-2000 04-07-2001 28-02-2003
WO 0074815	A	14-12-2000	NL 1012245 C2 AU 761007 B2 AU 5431300 A DE 20023079 U1 EP 1187667 A2 WO 0074815 A2 NO 20015925 A	06-12-2000 29-05-2003 28-12-2000 13-03-2003 20-03-2002 14-12-2000 04-02-2002